


# StrapPack<sup>®</sup>

## Pallet Strapping Machine

D-53HE2

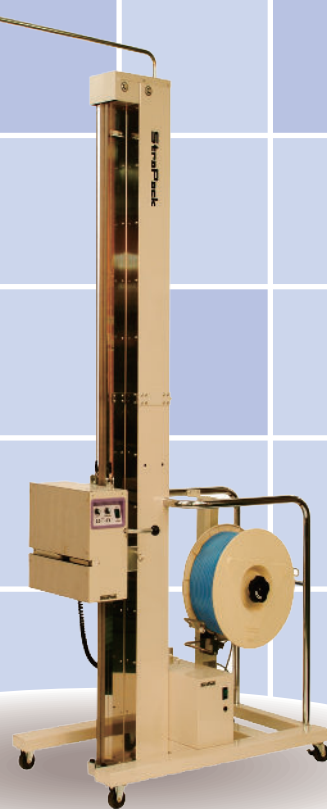

D-53PLT2



# D-53PLT2, D-53HE2

# D-53PLT2, D-53HE2

## Pallet Strapping Machine



### D-53 PLT2

#### ■ Versatile Tension Capability

Manual Tension or Automatic Tension are available by means of a simple selector switch.

#### < Manual Tension Mode >

The strap tension can be controlled manually via the Operation Bar, allowing edge protection to be secured to the pallet prior to strap completion.

#### < Auto Tension Mode >

Strap tension is applied automatically at a preselected level.

#### ■ Simple Operation

Operator friendly! Only the use of the Operation Bar (Manual Tension) and the Start Switch are needed for complete strap operation.


#### ■ 4-Way Pallet Entry

The bayonet height can be adjusted (35mm, 22.5mm, 10mm / 1.4in ,0.9in ,0.4in ) by a simple lever. Allows cross strapping through various sized pallet opening.

#### ■ Lower Sealing for Small Pallets

Sealing Point is only 340mm(14 in.) from the floor. Lower pallets can be strapped easily.

### D-53PLT2

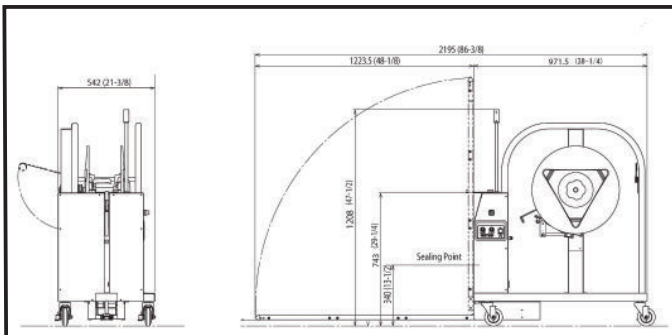

### D-53 HE2

#### ■ Easy Height Adjustment

Strapping height is quickly adjusted through the easily operated counterbalance that moves smoothly and effortlessly to the desired strap location.


#### ■ Simple Operation

The innovative pendant switch allows operation of the machine from either side of the load while enabling the operator to control the feeding, tensioning, and sealing of the strap with one hand.

Operator control makes positioning of the strap and/or the placement of corner protection an easy task.

Battery operated type is also available for both models.

### D-53HE2

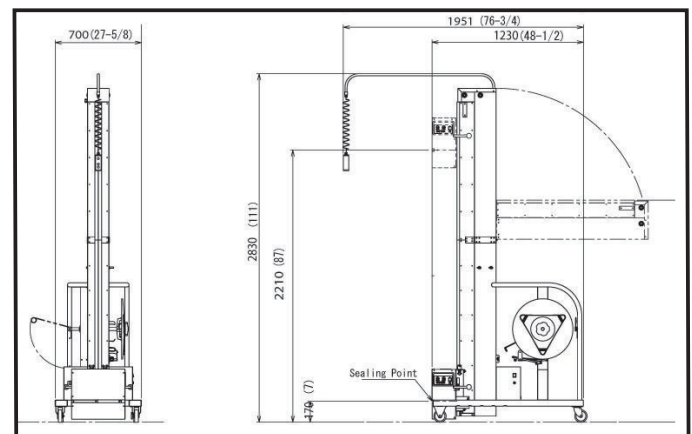

#### ■ Standard Specifications

		D-53PLT2	D-53HE2
Dimension	Width	2195 mm (86-3/8)	1230 mm (48-1/2 in.)
	Height	1208 mm (47-1/2)	2830 mm (111 in.)
	Depth	542 mm (21-3/8)	700 mm (27-5/8 in.)
	Weight	approx 90kg (198lbs)	approx 160kg (353lbs)
Bayonet Height		10,22.5,35 mm (3/8, 7/8, 1-3/8)	-
Package Size	Height	380 mm (15) - free	170-2210 (6-3/4 - 87in.)
Joint / Strap/ Coil		heat seal / polypropylene ID 200 X OD 450 X W 200 mm	heat seal / polypropylene ID 8 X OD 18 X W 8 in.
Strap Width		12, 15.5 mm (1/2, 5/8 in.)	
Strap Tension		90-690N (9-70kgf) (20-156lbs)	
Power Supply		100, 110, 120, 200, 220, 230 ,240 V 1 Phase 50 / 60 Hz 0.4 KVA	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2011 Strapack Corporation

#### DISTRIBUTED BY:

#### STRAPACK CORPORATION

7-16-14, Ginza, Chuo-ku Tokyo 104-0061, JAPAN

Phone 81-3-6278-1805 Fax. 81-3-6278-1806

(URL) <http://www.strapack.com> (E-mail) [info@strapack.com](mailto:info@strapack.com)

#### STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.

Phone 1-510-475-6000 Fax. 1-510-475-6090

#### STRAPACK, N.V./S.A.

Uilenbaan 200, 2160 Wommelgen, BELGIUM

Phone 32-3-355-1520 Fax. 32-3-355-1521